The Nobi Ceiling is an AI-powered, ceiling-mounted device purpose-built to safeguard older adults and people with physical or cognitive impairments. More than just a light, it functions as a proactive care system offering 24/7 monitoring, fall detection, emergency alerts, two-way voice communication, and preventive insights, all in one sleek unit.

Product name	Nobi Ceiling Light 2.1 kit
Model number (SKU)	144025

User experience

Environment	Indoor dry location (living room, bedroom...)
Install instructions	Scan this QR code for step by step instructions

Physical characteristics

Weight	Nobi Ceiling Light 2.1: 9.04 lbs / 4.1 kg Nobi Power 2.1: 0.88 lbs / 0.4 kg
Color	Desert PANTONE 13-4403 TPG
IP rating	IP20
Operating temperature	50 °F to 104 °F / 10 °C to 40 °C

Dimensions

(Detection area: Ø 26 ft / 8 m)



Ceiling adapter (optional):
h 0.41 in / 10.5 mm
Ø 6.63 in /168.4 mm

Ø 8.9 in / 226 mm
h 7.55 in / 191.7 mm

h 5.39 in / 136.8 mm



Ø 15.16 in / 385 mm

Light specifications

Color temperature	LED light (2700 – 6500 K)
Brightness	2,377 lm
Luminous efficacy	68.1 lm/W
Color rendering index	96

Luminous intensity distribution

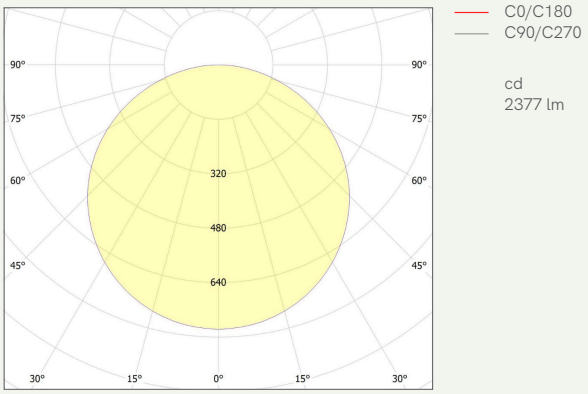

Technical specifications

Operating voltage	100/240 V AC (50/60 Hz)
Maximum output	24 V / 2.2 A
Power consumption	Standby: 18 W Normal: 52 W

Order information

Content	**Box A**	Nobi Ceiling Light 2.1 (144016)
	Box B	Nobi Power 2.1 (144017) Ceiling adapter 4 metric screws
EAN code		5407011440255
Contact		Nobi USA Inc. 820 Gessner Road Suite 300, Houston TX 77024, US Nobi NV Neerlandweg 16 2610 Wilrijk, BE

Connectivity & compatibility

Bluetooth	BLE 5.0
WIFI	802.11 a/b/g/n/ac
Compatibility	iOS and Android

Environment & safety

Warranty	2 years
Certifications	FCC ID N6C-SXPCEAC2 R-41268240
Recycling	